


HANDHELD REMOTE FOR SEAMLESS ADJUSTMENTS

Motorized Functions

Electric Backrest & Footrest

Adjust with a simple press on the hand switch. CPR positioning is available with one-touch electronic function.v v

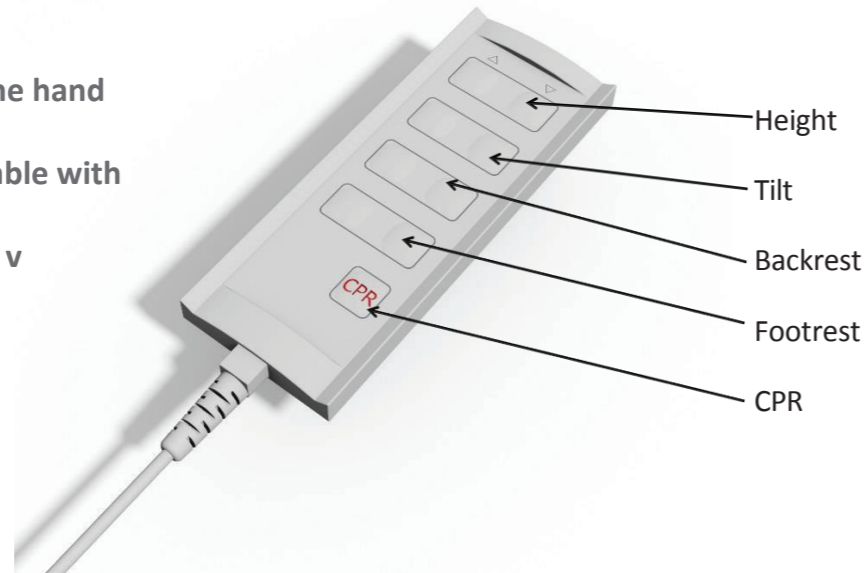

Technical Specifications

N1		Electrical Data 220/240v		Electrical Data 110/120v	
Head Length (cm)	80	Motor(s)	LinakLA23 x 1	Motor(s)	LinakLA23 x 1
Seat Length (cm)	49		LinakLA31 x 4		LinakLA31 x 4
Foot Length (cm)	62	Control Box	Linak CB16	Control Box	Linak CB16
Width (cm)	63	Current	1.5A	Current	2.7A
Overall Length (cm)	196	Power	360W	Power	360W
Height Range (cm)	50-100	Mains Plug Fuse	5.0A x 1	Mains Plug Fuse	5.0A x 1
Max Working Load	250kg	Internal Fuse	1.5A x 1	Internal Fuse	3.0A x 1
Control	Hand switch	System Voltage	24v	System Voltage	24v
		IP Rating	IPX4	IP Rating	IPX4

Inkernel Medical Industries is an ISO Audited company to ISO9001:2008,ISO45001:2018,ISO13485:2016



Nefertiti

N1

INDOOR PATIENT TRANSPORT CHAIR

ATTRACTIVE DESIGN MEETS FUNCTIONALITY AND SAFETY

Factory: Part No.17, The Second Industrial Zone, ELSalheya ALGadeda-Sharkia
Sales department: +2 0102722034
Telephone: +2 055 320 3694 - +2 055 320 3695- +2 055 320 3697- +2 055 320 3698
egypt@inkernel.com technical.office@inkernel.com




DialysisChair

DESCRIPTIONS

- ★ Whole chair with steel frame provide strong bearing capability, safe working load up to 240kg.
- ★ High density (450) polyurethane foam for mattress with moderate elasticity and durability provides additional comfort for patients having to sit for long periods.
- ★ Soft upholstery makes of breathable pvc material, which is waterproof, fire retardant, anti-corrosion, easily clean & disinfection,. The pvc leather is resistant to disinfectants, blood and urine too.
- ★ The hand control and two denmark linak motors allow for quick positioning for any situations, including trendelenburg) or shock position) with the push of one button.
- ★ Mute medical castors of 100mm with separate brake.
- ★ The detachable headrest pillow can be adjusted according to the height of each patient.



SMART MOBILITY

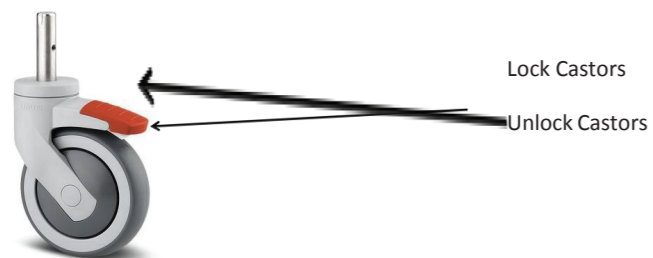

Castor Wheels (125 mm Locking Swivel)
 Central pedal-operated locking
 Three positions: Locked, Unlocked, Directional
 Easy maneuverability for room positioning

SAVING SPACE

Overall chair dimension: L 196cm x W 63cm x H50-100cm. Smaller overall chair dimension to save up to 40% of floor space



- ★ Comfortable Arm & Foot Support
- ★ Padded Armrests
- ★ Adjustable height, angle, and rotation
- ★ Optional self-leveling armrests
- ★ Lockable for added stability
- ★ Footrest Options
- ★ Manual adjustment via star wheel
- ★ Electric adjustment with handset
- ★ Designed for resting only – not a step



MULTI-POSITION ADJUSTMENT

Multiple independent adjustment possibilities by 2 Denmark Linak motors and one spring gas offer maximum patient comfort and reduction in staff work load.



SITTING POSITION



RELAX POSITION



TRENDELENBURG POSITION



LYING POSITION